

Automotive Electronics

M_TTCAN IP Module



BOSCH
Invented for life

```
process (BOSCH M_TTCAN IP)
begin
  if (CAN IP Module in VHDL)
  then
    -- M_TTCAN

    endif;
  end process;
```

M_TTCAN IP Module

Features

- ▶ Conform with CAN Protocol 2.0 A, B and ISO 11898-1, -4
- ▶ TTCAN protocol level 1 and level 2 completely in hardware
- ▶ Event synchronized time-triggered comm. supported
- ▶ Bit rates up to 1 MBit/s
- ▶ CAN Error Logging
- ▶ AUTOSAR optimized
- ▶ SAE J1939 optimized
- ▶ Improved acceptance filtering
- ▶ Two configurable Receive FIFOs
- ▶ Signalling on reception of High Priority Messages
- ▶ Dedicated Transmit Buffers
- ▶ Configurable Transmit FIFO
- ▶ Configurable Transmit Queue
- ▶ Configurable Transmit Event FIFO
- ▶ Direct Message RAM access for Host CPU
- ▶ Multiple M_TTCANs may share the same Message RAM
- ▶ Programmable loop-back test mode
- ▶ Maskable module interrupts
- ▶ 8/16/32-bit Generic CPU Interface, connectable to customer-specific Host CPUs
- ▶ Two clock domains (CAN clock and Host clock)
- ▶ Power-down support

General description


The M_TTCAN is a new TTCAN IP module that can be realized as a stand-alone device, as part of an ASIC, or as an FPGA. It performs communication according to the Bosch CAN protocol specification 2.0 part A, B and according to ISO 11898-4 (Time-triggered communication on CAN). It provides all features of time-triggered communication, including event synchronized time-triggered communication, global system time, and clock drift compensation. The bit rate can be programmed to values up to 1 MBit/s. Additional transceiver hardware is required for connection to the physical layer.

The message storage is intended to be a single- or dual-ported Message RAM outside of the module. It is connected to the M_TTCAN via the Generic Master Interface. Depending on the chosen integration, multiple M_TTCAN controllers can share the same Message RAM. All functions concerning the handling of messages are implemented by the Rx Handler and the Tx Handler. The Rx Handler manages message acceptance filtering, the transfer of received messages from the CAN Core to the Message RAM and provides receive message status information.

The Tx Handler is responsible for the transfer of transmit messages from the Message RAM to the CAN Core and provides transmit status information.

Acceptance filtering is implemented by a combination of up to 128 filter elements whereas each one can be configured as a range, as a bit mask, or as a dedicated ID filter.

The M_TTCAN module is delivered with a 32-bit CPU interface. For Altera FPGAs the Altera Avalon bus interface is provided, for Lattice the Wishbone interface. They can easily be replaced by a user-defined module interface.

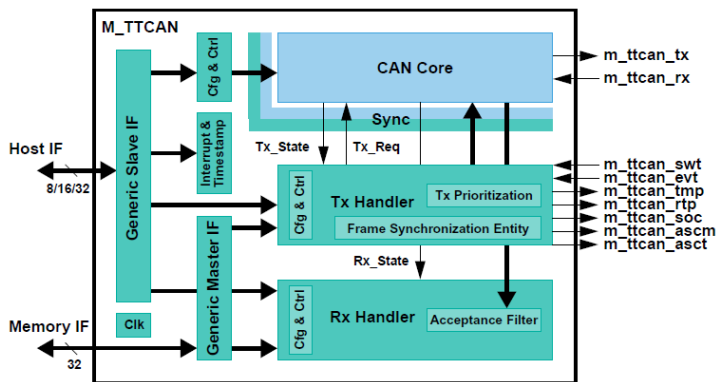

Block functions and size

CAN_Core

The CAN_Core performs communication according to the CAN protocol version 2.0 A, B and ISO 11898-1.

Sync

Synchronizes signals between the two clock domains.

Cfg & Ctrl

CAN Core related configuration and control bits.

Interrupt & Timestamp

Interrupt control and 16-bit CAN bit time counter for receive and transmit timestamp generation. An externally generated 16-bit vector may substitute the integrated counter.

Generic Slave Interface

Connects the M_TTCAN to a wide range of customer CPUs.

Generic Master Interface

Connects the M_TTCAN access to an external 32-bit Message RAM. A single M_TTCAN can use at most 1152 words • 32 bit.

Tx Handler

Controls the message transfer from the external Message RAM to the CAN Core. The Tx Handler also implements the Frame Synchronization Entity FSE which controls timetriggered communication according to ISO11898-4. A maximum of 32 Tx Buffers can be configured for transmission. Transmit cancellation is also supported.

Rx Handler

Controls the transfer of received messages from the CAN Core to the external Message RAM. The Rx Handler supports two Receive FIFOs, each of configurable size, holding all messages that have passed acceptance filtering. An Rx timestamp is stored together with each message. Up to 128 filters can be defined for 11-bit IDs and up to 64 filters for 29-bit IDs.

Approximate size of M_TTCAN IP module for ASIC design

M_TTCAN	44k gates
Message RAM	max. 34kbits / M_TTCAN instance

Approximate size of M_TTCAN IP module for Altera FPGAs

M_TTCAN	6200 ALUTs + 3200 Dedicated Regs + 9 M4Ks RAM
---------	---

Approximate size of M_TTCAN IP module for Lattice FPGAs

M_TTCAN	tbd.
---------	------

Deliverables for ASIC design

- ▶ Well documented VHDL source code
- ▶ VHDL test bench environment
- ▶ M_TTCAN User's Manual (programmer's view)
- ▶ M_TTCAN System Integration Guide (designer's view)
- ▶ M_TTCAN Module Integration Guide (designer's view)
- ▶ M_TTCAN Conformance Test Report

Deliverables for FPGA design

- ▶ Altera encrypted VHDL source code or Lattice synthesized core netlist
- ▶ VHDL Source Code of an example system design with RAM and an example arbiter instance
- ▶ Source code of Altera Avalon bus interface for Altera or Wishbone interface for Lattice
- ▶ M_TTCAN User's Manual (programmer's view)
- ▶ M_TTCAN FPGA Integration Guide
- ▶ M_TTCAN FPGA Integration Guide (designer's view)
- ▶ M_TTCAN Conformance Test Report
- ▶ Programming examples for fast start up

Supported FPGA families

- ▶ Altera Cyclone and Stratix series
- ▶ Lattice ECP and XP series

Regional sales contacts

Europe/Japan	bosch.semiconductors@de.bosch.com
USA/Canada	bosch.semiconductors@us.bosch.com
China	bosch.semiconductors@cn.bosch.com
Korea	bosch.semiconductors@kr.bosch.com

www.bosch-semiconductors.com
www.bosch-sensors.com

Robert Bosch GmbH

AE/SCS3
 Postfach 13 42
 72703 Reutlingen
 Germany

www.bosch.de